





# Single Row Radial Ball Bearings


Stainless Steel - Inch Series SS 1600

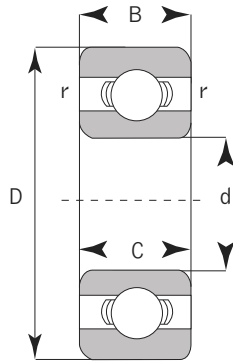

Open



2RS



ZZ

Unit No.	Bore d		Outer Diameter D		Width B		Radius inch	Basic Load Rating Rating lbs		Weight lbs
	fract.	inch	fract.	inch	fract.	inch	r	Dynamic Cr	Static Cor	
SS 1601	3/16	0.1875	11/16	0.6875	1/4*	0.2500*	0.012	280	125	0.012
SS 1602	1/4	0.2500	11/16	0.6875	1/4*	0.2500*	0.012	280	125	0.013
SS 1603	5/16	0.3125	7/8	0.8750	9/32**	0.2812**	0.012	549	233	0.023
SS 1604	3/8	0.3750	7/8	0.8750	9/32**	0.2812**	0.015	549	233	0.021
SS 1605	5/16	0.3125	29/32	0.9062	5/16	0.3125	0.012	580	239	0.032
SS 1606	3/8	0.3750	29/32	0.9062	5/16	0.3125	0.015	580	239	0.030
SS 1607	7/16	0.4375	29/32	0.9062	5/16	0.3125	0.015	580	239	0.035
SS 1614	3/8	0.3750	1-1/8	1.1250	3/8	0.3750	0.025	708	376	0.077
SS 1615	7/16	0.4375	1-1/8	1.1250	3/8	0.3750	0.025	708	376	0.071
SS 1616	1/2	0.5000	1-1/8	1.1250	3/8	0.3750	0.025	708	376	0.066
SS 1620	7/16	0.4375	1-3/8	1.3750	7/16	0.4375	0.025	830	470	0.105
SS 1621	1/2	0.5000	1-3/8	1.3750	7/16	0.4375	0.025	830	470	0.106
SS 1622	9/16	0.5625	1-3/8	1.3750	7/16	0.4375	0.025	830	470	0.101
SS 1623	5/8	0.6250	1-3/8	1.3750	7/16	0.4375	0.025	830	470	0.088
SS 1628	5/8	0.6250	1-5/8	1.6250	1/2	0.5000	0.025	1478	791	0.159
SS 1630	3/4	0.7500	1-5/8	1.6250	1/2	0.5000	0.025	1478	791	0.143
SS 1633	5/8	0.6250	1-3/4	1.7500	1/2	0.5000	0.025	1478	791	0.203
SS 1635	3/4	0.7500	1-3/4	1.7500	1/2	0.5000	0.025	1478	791	0.187
SS 1638	3/4	0.7500	2	2.0000	9/16	0.5625	0.035	1566	874	0.265
SS 1640	7/8	0.8750	2	2.0000	9/16	0.5625	0.035	1566	874	0.247
SS 1641	1	1.0000	2	2.0000	9/16	0.5625	0.035	1566	874	0.221
SS 1652	1-1/8	1.1250	2-1/2	2.5000	5/8	0.6250	0.035	2074	1301	0.463
SS 1654	1-1/4	1.2500	2-1/2	2.5000	5/8	0.6250	0.035	2074	1301	0.419
SS 1657	1-1/4	1.2500	2-9/16	2.5625	11/16	0.6875	0.035	2690	1683	0.474
SS 1658	1-5/16	1.3125	2-9/16	2.5625	11/16	0.6875	0.035	2690	1683	0.441

Other sizes could be available upon request. Minimum quantity may apply.

\*Width 5/16 inch for RS, 2RS

\*\*Width 11/32 inch for RS, 2RS, Z & ZZ

2RS stands for "Double Rubber Seals".

ZZ stands for "Shielded".