




Single Row Radial Ball Bearings

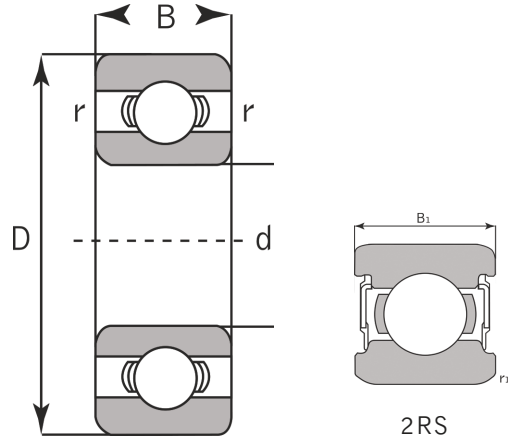

63000

Unit No.	Bore (in)	Outer Diameter (in)	Width (in)	Radius (in)	Basic Load Rating (lbs)		Limiting speed (rpm)	Weight (lbs)
	d	D	B	r	Dynamic Cr	Static Cor		
63000 2RS	10	26	12	0.5	792	407	17 500	0.132
63001 2RS	12	28	12	0.5	858	473	15 500	0.181
63002 2RS	15	32	13	0.5	968	572	13 500	0.254
63003 2RS	17	35	14	0.5	1 034	638	11 500	0.317
63004 2RS	20	42	16	1.0	1 606	1 012	10 000	0.511
63005 2RS	25	47	16	1.0	1 706	1 166	8 900	0.511
63006 2RS	30	55	19	1.5	2 288	1 620	7 500	0.511
63007 2RS	35	62	20	1.5	2 640	2 002	6 600	0.633
63008 2RS	40	68	21	1.5	2 816	2 222	6 000	0.763
63009 2RS	45	75	23	1.5	3 520	2 926	5 300	0.749
63010 2RS	50	80	23	1.5	3 718	3 146	5 000	0.842

62200

Unit No.	Bore (in)	Outer Diameter (in)	Width (in)	Radius (in)	Basic Load Rating (lbs)		Limiting speed (rpm)	Weight (lbs)
	d	D	B	r	Dynamic Cr	Static Cor		
62200 2RS	10	30	14	1.0	836	396	14 500	0.062
62201 2RS	12	32	14	1.0	1 100	616	14 000	0.070
62202 2RS	15	35	14	1.0	1 254	726	12 500	0.092
62203 2RS	17	40	16	1.0	1 562	902	11 000	0.112
62204 2RS	20	47	18	1.5	2 200	1 386	9 500	0.194
62205 2RS	25	52	18	1.5	2 376	1 540	8 300	0.220
62206 2RS	30	62	20	1.5	3 300	2 200	7 000	0.350
62207 2RS	35	72	23	2.0	4 356	2 860	6 000	0.462
62208 2RS	40	80	23	2.0	4 620	3 190	5 100	0.570
62209 2RS	45	85	23	2.0	5 060	3 520	4 700	0.759
62210 2RS	50	90	23	2.0	5 500	4 070	4 300	0.814

62300

Unit No.	Bore (in)	Outer Diameter (in)	Width (in)	Radius (in)	Basic Load Rating (lbs)		Limiting speed (rpm)	Weight (lbs)
	d	D	B	r	Dynamic Cr	Static Cor		
62300 2RS	10	35	17	1.0	1 364	770	12 500	0.143
62301 2RS	12	37	17	1.5	1 650	946	11 500	0.163
62302 2RS	15	42	17	1.5	1 848	1 100	11 000	0.242
62303 2RS	17	47	19	1.5	2 200	1 276	9 500	0.328
62304 2RS	20	52	21	2.0	2 574	1 584	8 800	0.433
62305 2RS	25	62	24	2.0	3 300	2 200	7 300	0.704
62306 2RS	30	72	27	2.0	4 400	3 014	6 100	1.067
62307 2RS	35	80	31	2.5	5 280	3 630	5 400	1.474
62308 2RS	40	90	33	2.5	6 600	4 598	4 700	2.002
62309 2RS	45	100	36	2.5	8 360	6 160	4 300	2.618