




Ball Bearings

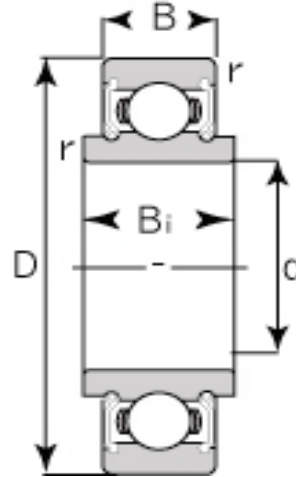

88000

Unit No.	Bore (inch / mm)	Outer Diameter (inch / mm)	Width (inch / mm)	Width (inch / mm)	Radius (inch / mm)	Basic Load Rating (lbs)		Weight (lbs)
	d	D	B	Bi	r	Dynamic Cr	Static Cor	
88602	0.5906 15	1.6535 42	0.5118 13	0.6692 17	0.040 1	1.940	0.976	0.210
88503	0.6693 17	1.5748 40	0.4724 12	0.6536 16.6	0.025 0.6	1.940	0.976	0.166
88603	0.6693 17	1.8504 47	0.5512 14	0.7086 18	0.040 1	2.885	1.494	0.279
88504	0.7874 20	1.8504 47	0.5512 14	0.6988 17.75	0.040 1	2.885	1.494	0.259
88604	0.7874 20	2.0472 52	0.5906 15	0.9055 23	0.040 1	3.150	1.785	0.398
88505	0.9843 25	2.0472 52	0.5906 15	0.6594 16.75	0.040 1	3.150	1.785	0.304
88605	0.9843 25	2.4409 62	0.6692 17	0.9843 25	0.040 1	3.150	1.785	0.650
88026	1.0236 26	2.0472 52	0.5906 15	0.6594 16.75	0.040 1	3.150	1.785	0.294
88506	1.1811 30	2.4409 62	0.6299 16	0.9448 24	0.040 1	1.970	1.140	0.571
88606	1.1811 30	2.8346 72	0.7480 19	1.0629 27	0.040 1	1.970	1.140	0.970
88507	1.3780 35	2.8346 72	0.6692 17	0.9843 25	0.040 1	2.120	1.330	0.765
88607	1.3780 35	3.1496 80	0.8268 21	1.1417 29	0.060 1.5	2.120	1.330	1.200
88508	1.5748 40	3.1496 80	0.8268 21	1.0629 27	0.040 1	2.960	1.820	1.180
88608	1.5748 40	3.5433 90	0.9055 23	1.2205 31	0.060 1.5	2.960	1.820	1.650
88509	1.7717 45	3.3456 85	0.8268 21	1.0629 27	0.040 1	3.300	2.050	1.220
88609	1.7717 45	3.9370 100	0.9843 25	1.3779 35	0.060 1.5	3.300	2.050	2.190
88510	1.9685 50	3.5433 90	0.8661 22	1.1811 30	0.040 1	3.560	2.350	1.400
88511	2.1654 55	3.9370 100	0.9055 23	1.2205 31	0.060 1.5	4.390	2.970	1.780
88512	2.3622 60	4.3307 110	0.9843 25	1.2992 33	0.060 1.5	5.900	3.070	2.340