


Bearing Insert

Bearing Style - Normal Duty

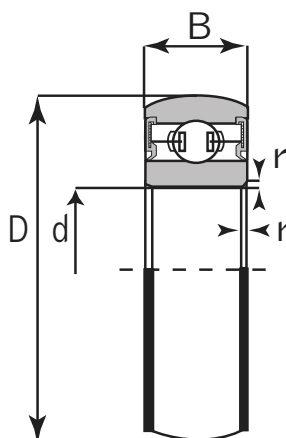

CS

Unit No.	Shaft Dia. (inch / mm)	Dimensions (mm)			Basic Load Rating lbf / N		Weight	
	d	D	B	r (min)	Dynamic Cr	Static Cor	kg	lbs
CS 201 2RS	12	32	10	0.6	1529 6800	686 3050	0.03	0.08
CS 202 2RS	15	35	11	0.6	1718 7650	836 3720	0.04	0.09
CS 203 2RS	17	40	12	0.6	2154 9580	1075 4780	0.05	0.11
CS 204 2RS	20	47	14	1	2877 12800	1495 6650	0.10	0.22
CS 205 2RS	25	52	15	1	3146 14000	1771 7880	0.11	0.24
CS 305 2RS	25	62	17	1.1	4991 22200	2585 11500	0.20	0.44
CS 206 2RS	30	62	16	1	4384 19500	2585 11500	0.18	0.39
CS 306 2RS	30	72	19	1.1	6070 27000	3417 15200	0.30	0.66
CS 207 2RS	35	72	17	1.1	5732 25500	3417 15200	0.25	0.55
CS 307 2RS	35	80	21	1.5	7463 33200	3417 15200	0.25	0.55
CS 208 2RS	40	80	18	1.1	6632 29500	4046 18000	0.32	0.70
CS 308 2RS	40	90	23	1.5	9172 40800	5395 24000	0.55	1.21
CS 209 2RS	45	85	19	1.1	7081 31500	4676 20800	0.37	0.81
CS 309 2RS	45	100	25	1.5	11869 52800	7081 31500	0.73	1.60
CS 210 2RS	50	90	20	1.1	7868 35000	5215 23200	0.41	0.90
CS 310 2RS	50	110	27	2	13893 61800	8542 38000	0.95	2.09