




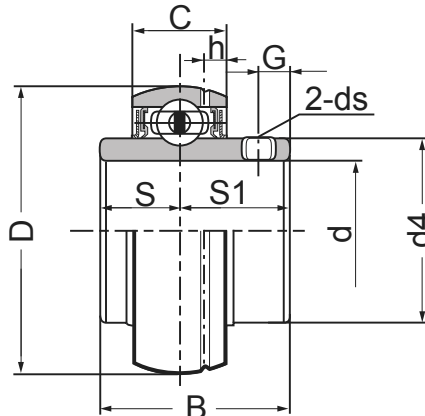

Ball Bearing Inserts

Stainless Steel - SUC Series

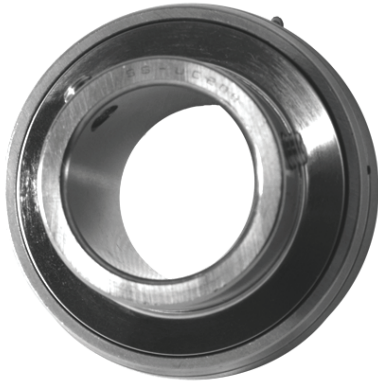

Dual Seal

Unit No.	Shaft Diameter (in / mm)	Dimensions (in / mm)									Basic Load Rating lbf / N		Mass	
	d	D	B	C	S	S1	G	ds	d4	h	Dynamic Cr	Static C0r	kg	lbs
SUC 201 201-8 202 202-10 203 204-12 204	12 mm 1/2 15 mm 5/8 17 mm 3/4 20 mm	1.8504 47	1.2205 31.0	0.6290 17	0.500 12.7	0.7205 18.3	0.197 5.0	10-32 M5 X 0.8	1.142 29.01	0.185 4.7	2524 11228	1320 5873	0.21 0.21 0.20 0.19 0.18 0.18 0.17	0.46 0.46 0.44 0.42 0.40 0.39 0.37
SUC 205-14 205-15 205 205-16	7/8 15/16 25 mm 1	2.0472 52	1.343 34.1	0.6693 17	0.563 14.3	0.7756 19.7	0.217 5.5	10-32 M5 X 0.8	1.339 34.01	0.177 4.5	2524 11228	1320 5873	0.23 0.21 0.20 0.20	0.51 0.46 0.44 0.44
SUC 206-18 206 206-19 206-20	1-1/8 30 mm 1-3/16 1-1/4	2.4409 62	1.5000 38.1	0.7480 19	0.626 15.9	0.8740 22.2	0.236 6.0	1/4-28 M6 X 0.75	1.594 40.49	0.181 4.6	3504 15588	1909 8490	0.37 0.33 0.33 0.30	0.82 0.73 0.73 0.66
SUC 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 35 mm 1-7/16	2.8346 72	1.6890 42.9	0.7874 20	0.689 17.5	1.0000 25.4	0.256 6.5	1/4-28 M6 X 0.75	1.843 46.81	0.181 4.6	4624 20568	2595 11543	0.55 0.52 0.49 0.49 0.46	1.21 1.15 1.08 1.08 1.01
SUC 208-24 208-25 208	1-1/2 1-9/16 40 mm	3.1496 80	1.9370 49.2	0.8268 21	0.748 19.0	1.1890 30.2	0.315 8.0	5/16-24 M8 X 1	2.079 52.81	0.177 4.5	4632 20604	3034 13496	0.69 0.66 0.65	1.52 1.46 1.43
SUC 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4 45 mm	3.3465 85	1.9370 49.2	0.8661 22	0.748 19.0	1.1890 30.2	0.315 8.0	5/16-24 M8 X 1	2.307 58.60	0.193 4.9	5888 26192	3450 15345	0.80 0.76 0.71 0.70	1.76 1.68 1.57 1.54
SUC 210-30 210-31 210 210-32	1-7/8 1-15/16 50 mm 2	3.5433 90	2.0315 51.6	0.9055 23	0.748 19.0	1.2835 32.6	0.354 9.0	5/16-24 M8 X 1	2.449 62.20	0.232 5.9	6320 28112	3885 17280	0.87 0.82 0.80 0.77	1.92 1.81 1.76 1.69
SUC 211-32 211-34 211 211-35	2 2-1/8 55 mm 2-3/16	3.9370 100	2.1890 55.6	0.9440 24	0.874 22.2	1.3150 33.4	0.354 9.0	3/8-24 M8 X 1	2.756 70.00	0.236 6.0	7808 34732	4914 21859	1.23 1.18 1.08 1.06	2.71 2.60 2.376 2.34
SUC 212-36 212 212-38 212-39	2-1/4 60 mm 2-3/8 2-7/16	4.3307 110	2.5630 65.1	1.024 26	1.000 25.4	1.5630 39.7	0.394 10.0	3/8-24 M10 X 1.25	3.031 76.99	0.244 6.2	9440 41992	6071 27008	1.66 1.53 1.51 1.44	3.66 3.37 3.33 3.17

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.