
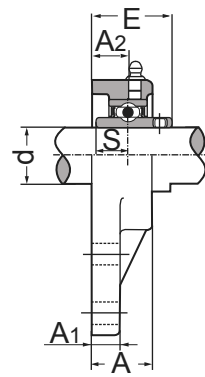


Flange Bracket Units

Stainless Steel - SSUCFB Series

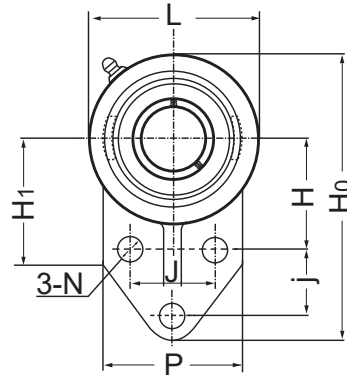

Also available with eccentric locking collar bearing

Unit No.	Shaft Dia. (inch / mm)	Dimensions (inch / mm)													Bolt Size	Bearing No.	Housing No.	Mass	
		d	H0	H1	L	P	H	j	J	A	A1	A2	N	E	S			kg	lbs
SSUCFB 201 201-8 202 202-10 203 204 204-12	12 mm 1/2 15 mm 5/8 17 mm 20 mm 3/4															SUC 201 201-8 202 202-10 203 204-12 204	SFB 204	0.70	1.54
SSUCFB 205-14 205-15 205 205-16	7/8 15/16 25 mm 1															SUC 205-14 205-15 205 205-16	SFB 205	0.80	1.76
SSUCFB 206-18 206 206-19 206-20	1-1/8 30 mm 1-3/16 1-1/4															SUC 206-18 206 206-19 206-20	SFB 206	1.00	2.20
SSUCFB 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 35 mm 1-7/16															SUC 207-20 207-21 207-22 207 207-23	SFB 207	1.60	3.54
SSUCFB 208 208-24 208-25	40 mm 1-1/2 1-9/16															SUC 208 208-24 208-25	SFB 208	1.78	3.92
SSUCFB 209 209-26 209-27 209-28	45 mm 1-5/8 1-11/16 1-3/4															SUC 209 209-26 209-27 209-28	SFB 209	2.20	4.84
SSUCFB 210 210-30 210-31 210-32	50 mm 1-7/8 1-15/16 2															SUC 210 210-30 210-31 210-32	SFB 210	2.50	5.50

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.