
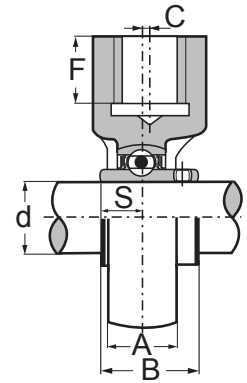


Hanger Units

Stainless Steel - SSUCHA Series

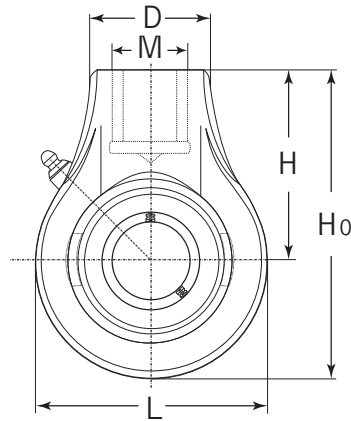

Also available with eccentric locking collar bearing

Unit No.	Shaft Dia. (inch / mm)	Dimensions (inch / mm)										Bearing No.	Housing No.	Mass	
	d	L	H0	C	A	H	M	D	F	B	S			kg	lbs
SSUCHA 201 201-8 202 202-10 203 204-12 204	12 mm 1/2 15 mm 5/8 17 mm 3/4 20 mm	2-17/32 64	3-25/32 96	0 0	13/16 21	2-33/64 64	Rp 3/4	1-9/16 40	3/4 19	1.2205 31.0	0.500 12.7	SUC 201 201-8 202 202-10 203 204-12 204	SHA 204	0.7	1.5
SSUCHA 205-14 205-15 205 205-16	7/8 15/16 25 mm 1	3-1/16 78	4-1/16 103	0 0	15/16 24	2-33/64 64	Rp 3/4	1-9/16 40	3/4 19	1.3425 34.1	0.563 14.3	SUC 205-14 205-15 205 205-16	SHA 205	1.0	2.2
SSUCHA 206-18 206 206-19 206-20	1-1/8 30 mm 1-3/16 1-1/4	3-1/16 78	4-1/16 103	0 0	1-3/32 28	2-33/64 64	Rp 3/4	1-9/16 40	3/4 19	1.5000 38.1	0.626 15.9	SUC 206-18 206 206-19 206-20	SHA 206	1.0	2.2
SSUCHA 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 35 mm 1-7/16	3-5/8 92	4-9/16 116	0 0	1-3/16 30	2-3/4 70	Rp 3/4	1-9/16 40	3/4 19	1.6890 42.9	0.689 17.5	SUC 207-20 207-21 207-22 207 207-23	SHA 207	1.4	3.1
SSUCHA 208-24 208-25 208	1-1/2 1-9/16 40 mm	3-25/32 96	4-3/4 121	3/32 2	1-5/16 33	2-7/8 73	Rp 3/4	1-9/16 40	3/4 19	1.9370 49.2	0.748 19.0	SUC 208-24 208-25 208	SHA 208	1.5	3.3
SSUCHA 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4 45 mm	4-1/4 108	5-11/32 136	3/16 5	1-3/8 35	3-15/64 82	Rp 1	1-7/8 40	13/16 21	1.9370 49.2	0.748 19.0	SUC 209-26 209-27 209-28 209	SHA 209	2.1	4.6
SSUCHA 210-30 210-31 210 210-32	1-7/8 1-15/16 50 mm 2	4-21/32 118	5-19/32 142	3/16 5	1-15/32 37	3-17/64 83	Rp 1	1-7/8 40	13/16 21	2.0315 51.6	0.748 19.0	SUC 210-30 210-31 210 210-32	SHA 210	2.6	5.7

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.

Designation of Thread	Dimensions (mm)		
	Major Diameter of Internal Thread	Pitch Diameter	Minor Diameter of Internal Thread
Rp 3/4 (PS 3/4)	26.441	25.279	24.117
Rp 1 (PS1)	33.249	31.770	30.291