




# Single Row Radial Ball Bearings

Stainless Steel - Series SS 6300

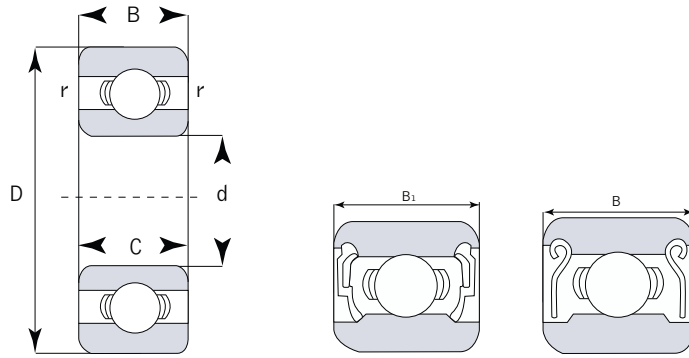

Open

2RS

ZZ

Unit No.	Bore d		Outer Diameter D		Width B		Radius r		Basic Load Rating Rating <b>lbs</b>		Weight <b>lbs</b>
	mm	inch	mm	inch	mm	inch	mm	inch	Dynamic Cr	Static Cor	
SS 6300	10	0.3937	35	1.3780	11	0.4331	1.0	0.039	1472	589	0.117
SS 6301	12	0.4724	37	1.4567	12	0.4724	1.5	0.059	1744	705	0.132
SS 6302	15	0.5906	42	1.6535	13	0.5118	1.5	0.059	2056	915	0.181
SS 6303	17	0.6693	47	1.8504	14	0.5512	1.5	0.059	2440	1103	0.254
SS 6304	20	0.7874	52	2.0472	15	0.5906	2.0	0.079	2880	1328	0.317
SS 6305	25	0.9843	62	2.4409	17	0.6693	2.0	0.079	3800	1845	0.511
SS 6306	30	1.1811	72	2.8346	19	0.7480	2.0	0.079	5360	2850	0.763
SS 6307	35	1.3780	80	3.1496	21	0.8268	2.5	0.098	6000	3225	1.01
SS 6308	40	1.5748	90	3.5433	23	0.9055	2.5	0.098	7320	4050	1.40
SS 6309	45	1.7717	100	3.9370	25	0.9843	2.5	0.098	9520	5400	1.84
SS 6310	50	1.9685	110	4.3307	27	1.0630	3.0	0.118	11120	6450	2.36
SS 6311	55	2.1654	120	4.7244	29	1.1417	3.0	0.118	12880	7575	3.02
SS 6312	60	2.3622	130	5.1181	31	1.2205	3.5	0.138	14720	8775	3.75

Other sizes could be available upon request. Minimum quantity may apply.

2RS stands for "Double Rubber Seals".

ZZ stands for "Shielded".