
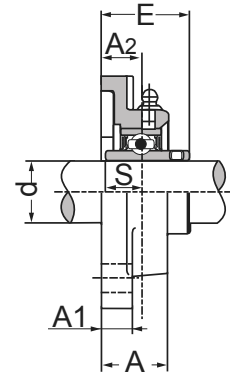
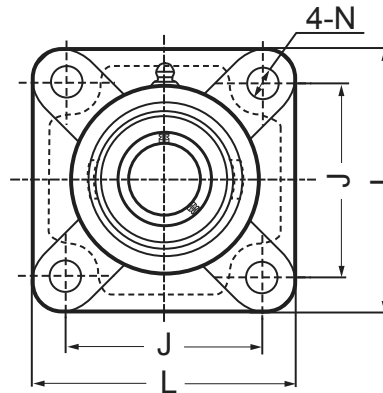


Square Flange Units

Stainless Steel - SSUCF Series

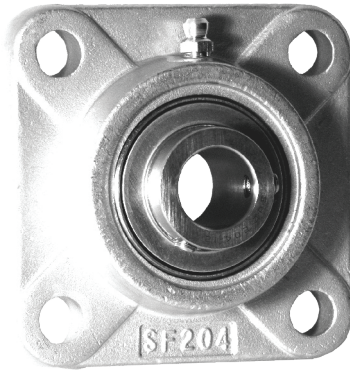

Also available with eccentric locking collar bearing

Unit No.	Shaft Dia. d (inch / mm)	Dimensions (inch / mm)								Bolt Size	Bearing No.	Housing No.	Mass	
		L	J	A2	A1	A	N	E	S				kg	lbs
SSUCF 201 201-8 202 202-10 203 204-12 204	12 mm 1/2 15 mm 5/8 17 mm 3/4 20 mm	3-3/8 86	2-33/64 63.9	19/32 15	7/16 11	1 25.5	15/32 12	1-5/16 33.3	0.500 12.7	3/8 M10	SUC 201 201-8 202 202-10 203 204-12 204	SF 204	0.7	1.5
SSUCF 205-14 205-15 205 205-16	7/8 15/16 25 mm 1	3-3/4 95	2-3/4 69.9	5/8 16	1/2 13	1-1/16 27.0	15/32 12	1-13/32 35.8	0.563 14.3	3/8 M10	SUC 205-14 205-15 205 205-16	SF 205	0.8	1.8
SSUCF 206-18 206 206-19 206-20	1-1/8 30 mm 1-3/16 1-1/4	4-1/4 108	3-17/64 82.9	45/64 18	1/2 13	1-7/32 31.0	15/32 12	1-37/64 40.2	0.626 15.9	3/8 M10	SUC 206-18 206 206-19 206-20	SF 206	1.0	2.2
SSUCF 207-20 207-21 207-22 207 207-23	1-1/4 1-5/16 1-3/8 35 mm 1-7/16	4-19/32 117	3-5/8 92.1	3/4 19	19/32 15	1-11/32 34.0	35/64 14	1-3/4 44.4	0.689 17.5	7/16 M12	SUC 207-20 207-21 207-22 207 207-23	SF 207	1.4	3.1
SSUCF 208-24 208-25 208	1-1/2 1-9/16 40 mm	5-1/8 130	4-1/64 102.0	53/64 21	19/32 15	1-13/32 36.0	5/8 16	2-1/64 51.2	0.748 19	1/2 M14	SUC 208-24 208-25 208	SF 208	1.8	4.0
SSUCF 209-26 209-27 209-28 209	1-5/8 1-11/16 1-3/4 45 mm	5-13/32 137	4-9/64 105.2	55/64 22	5/8 16	1-1/2 38.0	5/8 16	2-1/16 52.2	0.748 19	1/2 M14	SUC 209-26 209-27 209-28 209	SF 209	2.2	4.9
SSUCF 210-30 210-31 210 210-32	1-7/8 1-15/16 50 mm 2	5-5/8 143	4-3/8 111.1	55/64 22	5/8 16	1-9/16 40.0	5/8 16	2-5/32 54.6	0.748 19	1/2 M14	SUC 210-30 210-31 210 210-32	SF 210	2.4	5.3
SSUCF 211-32 211-34 211 211-35	2 2-1/8 55 mm 2-3/16	6-3/8 162	5-1/8 130.2	63/64 25	23/32 18	1-11/16 43.0	3/4 19	2-19/64 58.4	0.874 22.2	5/8 M16	SUC 211-32 211-34 211 211-35	SF 211	3.6	7.9
SSUCF 212-36 212 212-38 212-39	2-1/4 60 mm 2-3/8 2-7/16	6-7/8 175	5-5/8 142.9	1-9/64 29	23/32 18	1-7/8 48.0	3/4 19	2-45/64 68.7	1 25.4	5/8 M16	SUC 212-36 212 212-38 212-39	SF 212	4.4	9.7

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.