




Four-Bolt Holes Flange Unit

Normal Duty

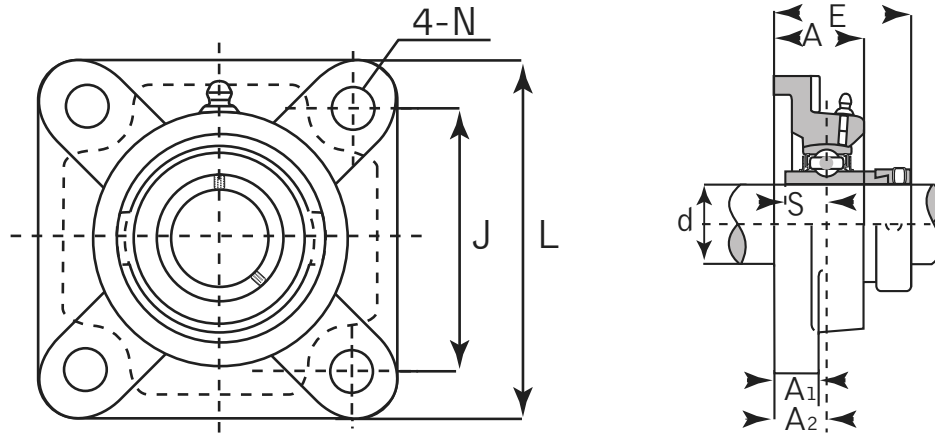


HCFU Eccentric Locking Collar

| Unit No. | Shaft Dia. (inch / mm) | Dimensions (inch / mm) | | | | | | | | Bolt Size | Bearing No. | Housing No. | Weight | |
|--|--|------------------------|----------------------|-----------------------|--------------------|--------------------|----------------------|------------------------|-----------------------|-------------|--|-------------|--------|------|
| | | d | L | J | A | A1 | A2 | N | E | | | | S | kg |
| HCFU 201 201-8 202 202-10 203 203-11 204 204-12 | 12 mm 1/2 15 mm 5/8 17 mm 11/16 20 mm 3/4 | 3-3/8 76 | 2-1/2 54 | 1-5/32 25.5 | 19/32 11 | 3/4 15 | 15/32 11.5 | 1-51/64 45.6 | 0.6732 17.1 | 3/8 M10 | HC 201 201-8 202 202-10 203 203-11 204 204-12 | FU 204 | 0.89 | 1.96 |
| HCFU 205 205-14 205-15 205-16 | 25 mm 7/8 15/16 1 | 3-21/32 93 | 2-3/4 70 | 1-3/16 30 | 19/32 15 | 3/4 19 | 15/32 12 | 1-13/16 45.9 | 0.6889 17.5 | 3/8 M10 | HC 205 205-14 205-15 205-16 | FU 205 | 0.81 | 1.78 |
| HCFU 206 206-18 206-19 206-20 | 30 mm 1-1/8 1-3/16 1-1/4 | 4-11/64 106 | 3-1/4 82.5 | 1-9/32 32.5 | 5/8 16 | 25/32 20 | 15/32 12 | 1-31/32 50.1 | 0.7204 18.3 | 3/8 M10 | HC 206 206-18 206-19 206-20 | FU 206 | 1.16 | 2.55 |
| HCFU 207 207-20 207-21 207-22 207-23 | 35 mm 1-1/4 1-5/16 1-3/8 1-7/16 | 4-9/16 116 | 3-5/8 92 | 1-3/8 35 | 43/64 17 | 53/64 21 | 35/64 14 | 2-3/32 53.3 | 0.7401 18.8 | 7/16 M12 | HC 207 207-20 207-21 207-22 207-23 | FU 207 | 1.50 | 3.30 |
| HCFU 208 208-24 208-25 | 40 mm 1-1/2 1-9/16 | 5-5/64 129 | 4 101.5 | 1-17/32 39 | 43/64 17 | 15/16 24 | 35/64 14 | 2-5/16 58.9 | 0.8425 21.4 | 7/16 M12 | HC 208 208-24 208-25 | FU 208 | 1.95 | 4.29 |
| HCFU 209 209-26 209-27 209-28 | 45 mm 1-5/8 1-11/16 1-3/4 | 5-5/16 135 | 4-9/64 105 | 1-37/64 40 | 45/64 18 | 15/16 24 | 5/8 16 | 2-5/16 58.9 | 0.8425 21.4 | 1/2 M14 | HC 209 209-26 209-27 209-28 | FU 209 | 2.27 | 4.99 |

Four-Bolt Holes Flange Unit

Normal Duty

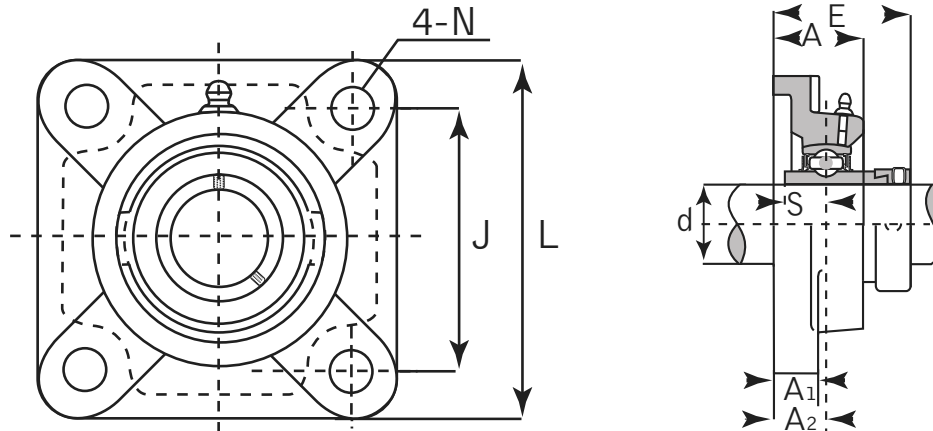

HCFU Eccentric Locking Collar

| Unit No. | Shaft Dia. (inch / mm) | Dimensions (inch / mm) | | | | | | | | Bolt Size | Bearing No. | Housing No. | Weight | |
|--|-----------------------------------|------------------------|-----------------------|-----------------------|--------------------|----------------------|--------------------|------------------------|-----------------------|------------|--------------------------------------|-------------|--------|-------|
| | | d | L | J | A | A1 | A2 | N | E | | | | S | kg |
| HCFU 210 210-30 210-31 210-32 | 50 mm 1-7/8 1-15/16 2 | 5-5/8 143 | 4-3/8 111 | 1-49/64 45 | 25/32 20 | 1-3/32 28 | 23/32 18 | 2-39/64 66.1 | 0.9685 24.6 | 5/8 M16 | HC 210 210-30 210-31 210-32 | FU 210 | 2.71 | 5.96 |
| HCFU 211 211-32 211-34 211-35 | 55 mm 2 2-1/8 2-3/16 | 6-3/8 162 | 5-1/8 130 | 1-59/64 49 | 53-64 21 | 1-7/32 31 | 23/32 18 | 2-17/32 74.6 | 1.0905 27.7 | 5/8 M16 | HC 211 211-32 211-34 211-35 | FU 211 | 3.70 | 8.14 |
| HCFU 212 212-36 212-38 212-39 | 60 mm 2-1/4 2-3/8 2-7/16 | 6-37/64 175 | 5-5/8 143 | 1-7/64 53.5 | 55/64 22 | 1-11/32 34 | 23/32 18 | 3-3/16 80.8 | 1.2204 31 | 5/8 M16 | HC 212 212-36 212-38 212-39 | FU 212 | 4.59 | 10.10 |
| HCFU 213 213-40 | 65 mm 2-1/2 | 7-1/4 184 | 5-55/64 149 | 2-9/32 58 | 55/64 22 | 1-1/2 38 | 23/32 18 | 3-17/32 89.6 | 1.3425 34.1 | 5/8 M16 | HC 213 213-40 | FU 213 | 5.99 | 13.18 |
| HCFU 214 214-43 214-44 | 70 mm 2-11/16 2-3/4 | 7-13/32 188 | 5-63/64 152 | 2-21/64 59 | 29/32 23 | 1-1/2 38 | 23/32 18 | 3-17/32 89.6 | 1.3425 34.1 | 5/8 M16 | HC 214 214-43 214-44 | FU 214 | 6.39 | 14.06 |
| HCFU 215 215-47 215-48 | 75 mm 2-15/16 3 | 7-7/8 200 | 6-17/64 159 | 2-7/16 62 | 15/16 24 | 1-39/64 41 | 23/32 18 | 3-49/64 95.8 | 1.4685 37.3 | 5/8 M16 | HC 215 215-47 215-48 | FU 215 | 7.32 | 16.10 |