





Pressed Stainless Steel




Housing Pillow Block - SSBSP Series

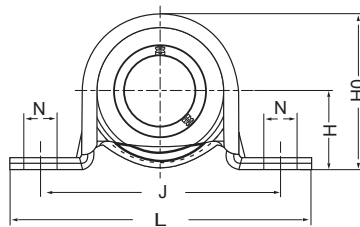

Unit No.	Shaft Dia. (inch / mm)	Dimensions (inch / mm)									Bolt Size	Bearing No.	Housing No.	Mass	
	d	H	L	J	A	N	H1	H0	B	S				kg	lbs
SSBSPP 201 201-8 202 202-10 203	12 mm 1/2 15 mm 5/8 17 mm	7/8 22.2	3-3/8 86	2-11/16 68.3	31/32 25	3/8 9.5	0.126 3.2	1-23/32 43.8	0.8661 22	0.236 6	5/16 M8	SSB 201 201-8 202 202-10 203	SPP 203	0.2	0.2
SSBSPP 204-12 204	3/4 20 mm	1 25.4	3-27/32 98	3 76.2	1-1/4 32	3/8 9.5	0.126 3.2	2 50.5	0.9843 25	0.276 7	5/16 M8	SSB 204-12 204	SPP 204	0.4	0.2
SSBSPP 205-14 205-15 205 205-16	7/8 15/16 25 mm 1	1-1/8 28.6	4-1/4 108	3-3/8 85.7	1-1/4 32	7/16 11.5	0.157 4.0	2-7/32 56.6	1.0630 27	0.295 7.5	3/8 M10	SSB 205-14 205-15 205 205-16	SPP 205	0.7	0.3

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.

Housing Round Flange Units - SSBSPF Series



Unit No.	Shaft Dia. (inch / mm)	Dimensions (inch / mm)								Bolt Size	Bearing No.	Housing No.	Mass	
	d	H	J	A1	N	A	B	S	D min.				kg	lbs
SSBSPF 201 201-8 202 202-10 203	12 mm 1/2 15 mm 5/8 17 mm	3-3/16 81.0	2-1/2 63.5	0.157 4	9/32 7.1	9/16 14	0.8661 22.0	0.236 6	1-59/64 49	1/4 M6	SSB 201 20-8 202 202-10 203	PP 203 SS	0.2	0.4
SSBSPF 204-12 204	3/4 20 mm	3-35/64 90.1	2-13/16 71.4	0.157 4	23/64 9	5/8 16	0.9843 25.0	0.276 7	2-13/64 56	5/16 M8	SSB 204-12 204	PP 204 SS	0.3	0.7
SSBSPF 205-14 205-15 205 205-16	7/8 15/16 25 mm 1	3-3/4 95.3	3 76.2	0.157 4	23/64 9	23/32 18	1.0630 27.0	0.295 7.5	2-23/64 60	5/16 M8	SSB 205-14 205-15 205 205-16	PP 205 SS	0.3	0.7

Other sizes could be available upon request. Minimum quantity may apply.
Please refer to page 52 for setscrew maximum torque informations.